

SAUTER Declaration on materials and the environment

Product



Type EGT353F101/F103/F110/F120 EGT354F102/F104/F111/F121

EGT355F902/F903

EGT356F102/F104/F111/F304

EGT456F012/F102 EGT654F102

Designation

Product range

Product group of eco-balance

Cable temperature sensor

Sensors and transducers

Controllers and sensors

Manufacturer	Fr. Sauter AG		
	Im Surinam 55, CH-4016 Basel		
Product description	CE conformity		
	Function, operation, maintenance, service	PDS 31.100	
Environmental risk	Fire protection according to	EN 60695-2-11, EN 60695-10-2	
	Fire load ¹	0.511.5 MJ	
	Hazardous substances ²	Conforming to RoHS 2011/65/EU	
	Banned substances (see link below)	Conforming to REACH 1907/2006/EC	
	Parts containing halogen (causing corrosive smoke)	Cable	
	Liquids polluting the aquatic environment	None	
	Explosive substances	None	
Packaging ³	Zip lock bag		

Materials

	Total weight of product ⁴	31553 g	Material Safety Data Sheet (MSDS)	EU waste code ⁵
Plastic				
PVC (cable)		27.5549.5 g	Yes	20 01 39
Silicone (cable)		29.8297.5 g	Yes	20 01 39
Metal				
Stainless steel (sens	sor sleeve)	2.78.0 g	Not required	20 01 40
Printed circuit boa	rd			
None				
Various				
None				
Special componen	ts			
Heat conducting pas	ste	1.0 g	Not required	20 01 99



The following materials balance and the calculation of the environmental impact relate to type EGT354F102.

¹ See **Remarks** on last page


² Only applies to electrical devices

³ Directive 94/62/EC and follow-on document, ruling 97/129/EC

⁴ See **Remarks** on last page

⁵ Directive 75/442/EEC and follow-on document, ruling 2001/118/EC

Materials balance

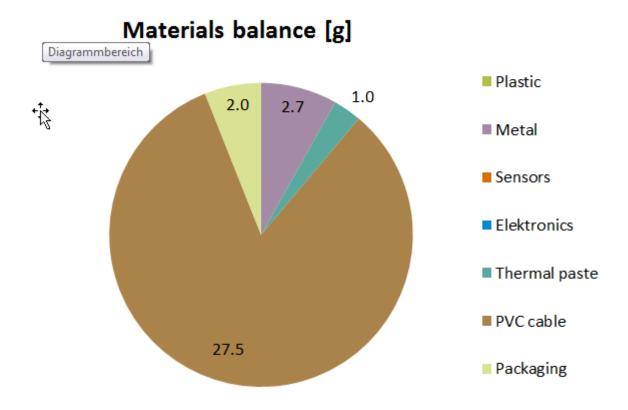

Energy requirement in the utilisation phase

Power requirement for component


•	Minimum power consumption	none
•	Average power consumption	none
•	Typical energy consumption per year	none

The energy requirement evaluation was performed for a typical utilisation scenario. The European electricity mix from ecoinvent 2.2 was used to evaluate the power consumption in the utilisation phase.

Calculation of the environmental impact

Evaluation over the entire life stage of 8 years in a typical utilisation scenario. The results additionally shown are based on a method of ecological scarcity that combines various environmental effects into an "environmental impact points" key figure. The method is based on Switzerland's environmental targets and evaluates the individual effects depending on the "Distance to Target".

Indicator	Unit	Production	Utilisation	Disposal	Total
Global warming potential					
(GWP), IPCC 2007, 100a	kg CO2 eq.	0.1	-	-	0.1
Cumulative energy demand (non-renewable resources)	MJ eq.	2	-	-	-
Cumulative energy demand (renewable resources)	MJ eq.	0.2	-	-	0
Acidification potential, CML 2001	kg SO2 eq.	2.02E-03	0.00E+00	0.00E+00	2.02E-03
Eutrophication potential, CML 2001	kg PO4 eq.	1.98E-03	0.00E+00	0.00E+00	1.98E-03
Ozone creation potential, CML 2001	kg C2H4 eq.	8.47E-05	0.00E+00	0.00E+00	8.47E-05
Ecological scarcity 2006: Total	UBP	900	-	-	1'000

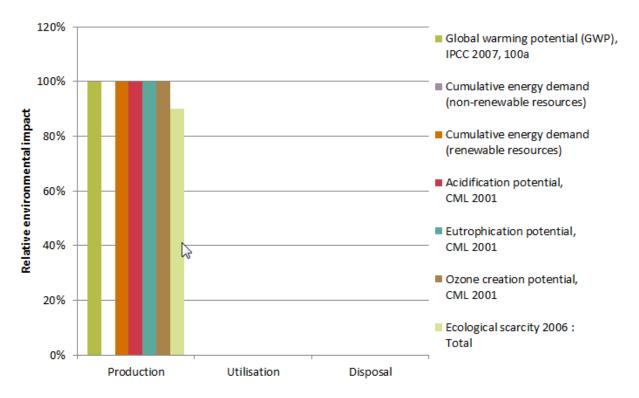

The relationship of the contributions made by the utilisation in comparison to those made by the production and disposal depends on the intensity of the utilisation (utilisation scenario).



Product:

The device must be disposed of as waste from electrical and electronic equipment (electrical/electronic scrap) and must not be disposed of as household waste. This applies in particular to the PCB assembly.

It is possible that special treatment for special components is compulsory by law or makes ecological sense.

Packaging:

Recyclable

The local and currently valid laws (WEEE2012/19/EU) must be observed.

Special information:

None

Remarks	(1) Depending on the fire load for the type:		
	EGT353F101	0.9 MJ	
	EGT353F103	1.7 MJ	
	EGT353F110	5.8 MJ	
	EGT353F120	11.5 MJ	
	EGT354F102	0.5 MJ	
	EGT354F104	1.7 MJ	
	EGT354F111	5.8 MJ	
	EGT354F121	11.5 MJ	
	EGT355F902	0.5 MJ	
	EGT355F903	1.0 MJ	
	EGT356F102	1.0 MJ	
	EGT356F104	1.5 MJ	
	EGT356F111	4.8 MJ	
	EGT356F304	1.5 MJ	
	EGT456F012	1.0 MJ	
	EGT456F102	1.0 MJ	

0,5 MJ

EGT654F102

	(2) Depending on the weight of the type:		
	EGT353F101	45 g	
	EGT353F103	86 g	
	EGT353F110	278 g	
	EGT353F120	553 g	
	EGT354F102	31 g	
	EGT354F104	86 g	
	EGT354F111	278 g	
	EGT354F121	553 g	
	EGT355F902	66 g	
	EGT355F903	69 g	
	EGT356F102	33 g	
	EGT356F104	93 g	
	EGT356F111	301 g	
	EGT356F304	93 g	
	EGT456F012	33 g	
	EGT456F102	33 g	
	EGT654F102	31 g	
How the environment benefits	With these products we make a significant contribution to energy savings buildings and to reducing global warming. In the Green Building area, our products ensure that customer requiremer are fulfilled optimally and that there is cost efficiency over the entire building life-cycle.		
Extent of applicability	This declaration is an environmental declaration based on ISO 14025 and describes the environmental impact of the product over its entire life stage.		

The declaration is made in a compact form without an external check or registration.

The data gathered have been evaluated with existing data inventories for production processes from the ecoinvent 2.2 European database.

For the determination of the energy requirement during the utilisation phase of the product, standard HVAC applications and average climatic conditions in Switzerland were assumed, based on the ecological accounting for the corresponding product group.



Disclaimer: This declaration is only for information purposes.

Deviations from the information it contains can occur without being reported. Fr. Sauter AG explicitly rules out any liability for any consequences that may result due to the above information.



Your local SAUTER representative will provide further information on environmental aspects, and specifically on disposal.

References

Ecoinvent 2010 ecoinvent data v2.2, Swiss Center for Life Cycle Inventories, Dübendorf FOEN 2008 eco-balances: method of ecological scarcity - eco-factors 2006, FOEN